




### DIMENSIONS:

DRIVER: 3.18"(W) x 5.51"(L) x 1.77"(H) w/18" LEADS

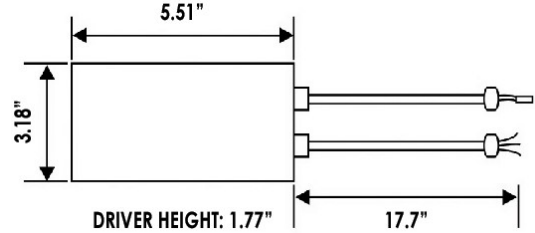

## CRL-EGN-27W-50K CRL-EGN-27W-40K CRL-EGN-27W-30K

### LED CRL Engine & Driver Unit

The LED Engine & Driver Unit combined with our oxidized metal trims provide you with the ultimate configuration for your recessed lighting needs. Great for retrofitting CFL, HID, Metal Halide and Incandescent.

#### ELECTRICAL SPECIFICATIONS:

- Input Wattage: 27W
- Input Voltage: 100-277VAC 50/60Hz
- Power factor: >0.9
- Efficacy: 88.4LM/W~90.86LM/W

#### HOUSING SPECIFICATIONS:

- Operating temperature: Below 113°F
- Lifespan: 50000 Hrs.
- IP rating: Damp Rated

#### CERTIFICATIONS: UL



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
CRL-EGN-27W-30K	27W	100~277V AC	2341LM	3000K
CRL-EGN-27W-40K	27W	100~277V AC	2366LM	4000K
CRL-EGN-27W-50K	27W	100~277V AC	2387LM	5000K

#### LIGHTING SPECIFICATIONS:

- Dimming: 0~10V dimmable
- LED type/brand: CREE COB
- Total lumens: 2341LM, 2366LM and 2387LM
- Color temperature: 3000K / 4000K / 5000K
- Color rendering index: >80
- Beam angle: 40°

#### WARRANTY: 5 years

