
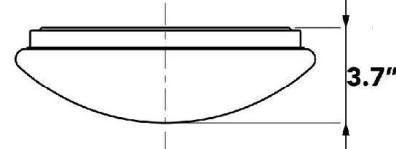


FCR & FCS

TECHNICAL SPECIFICATIONS:

- :: Construction: Spun aluminum with white powder coat finish
- :: Lens material: PMMA
- :: LED: Seoul DOB (Driver On Board) Technology
- :: Gasket: close cell Neoprene foam gasket
- :: Optics: White translucent acrylic lens
- :: 1" deep
- :: Voltage: 120V AC
- :: Dimmable down to 10% using an approved dimmer
- :: Power factor: 90% +
- :: Suitable for damp locations when gasket is used
- :: Maximum Ambient Temperature: 104°F
- :: ETL-listed
- :: Energy Star-rated

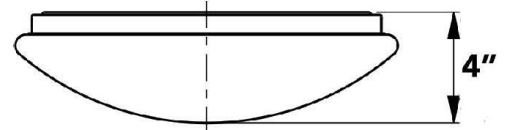

LED CLOUD FIXTURES

CATALOG NO.	SIZE	WATTS	COLOR TEMP	LUMENS	SHAPE
FCR-11-12W-40K	11" Diameter	15W	4000K	550LM	ROUND
FCR-14-18W-40K	14" Diameter	22W	4000K	750LM	
FCS-11-12W-40K	11" Diameter	15W	4000K	550LM	SQUARE
FCS-14-18W-40K	14" Diameter	22W	4000K	750LM	

