


ICFAL SERIES Indoor Lighting

ICFAL-6
AIRTIGHT FIRE-RATED NEW CONST. LED RECESSED LIGHT HOUSING

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

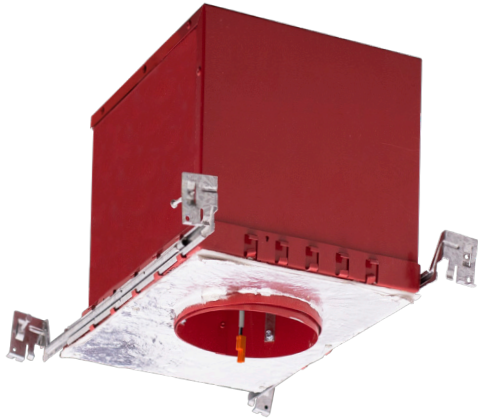


Customer Name: _____

Project Name: _____

Note: _____ Type: _____

6" Type IC fire-rated new construction LED housing. Compatible with LED lamps with quick connector. 2-hour fire-rated & air-tight certified.

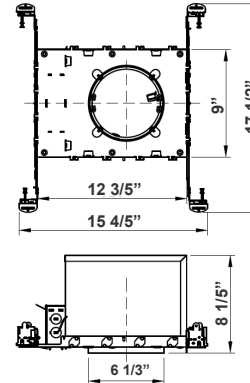

17 1/2"(H) x 15 4/5"(W) x 6 1/3"(D)

Features

- Type IC Rated for Direct Contact With Insulation; Complies With The Standard of UL for Luminaires (UL 1598)
- ETL Listed for 2-Hour Fire Resistance to Meet and Exceed Strict Fire UL 263 Safety Code
- Meets Title 24 Requirements
- Rated for Direct Contact With IC Insulation
- LED quick connector provided
- ETL ASTM E283/E283M-19 Air Tight certified
- Integrated Non-Combustible Insulation Acts As a Sound Barrier Minimizing Sound Transfer Between Floors
- Trims and Inserts Sold Separately

Technical Specifications

Electrical:

- Voltage: 120V or 277V
- Wattage: 22W

Mechanical:

- Double wall IC rated for direct contact with insulation.
- For use in IC and non-IC conditions
- Housing adjusts in frame to accommodate up to 1 1/2" ceiling thickness
- Airtight housing with gasket to restrict airflow in accordance with ASTM E-283 air-tight requirements
- Suitable for Damp Locations

Junction Box:

- Pre-wired #21 gauge galvanized steel junction box with (7) 1/2" knockouts and (4) Romex® knockouts and removable plates

Hanger Bars:

- Pre Installed hanger bars with True Nail easy installation in regular lumber, engineered lumber, and Laminated Beams. Integral T-bar slots for easy installation in T-Bars. Spans up 24" and can be repositioned 90°. Score lines allow for tool-free hanger bar size reduction. Integral leveling flange allows for single-person installation while easily aligning the housings with the joists

Applications:

- Designed for ceiling plenums where 2x8 joists or taller are used
- High strength hanger bars can easily be nailed to joists
- Suitable for T-grid and drop ceiling applications
- See installation sheet for detailed information

Other Models:

- 14W | ICFAL-4




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co



Other Views:



Side View




Top View



Back View


Westgate Compatible Recessed Trims:

RDP6

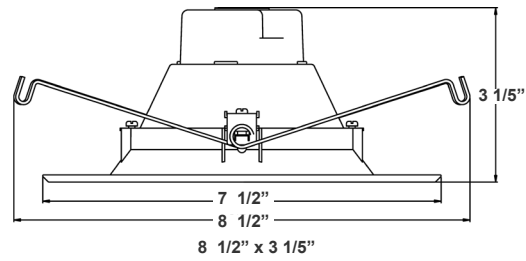

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDPF6-MCT5	13W	120V	1040LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDPS6-MCT5	13W	120V	1040LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K

RDL6-ST

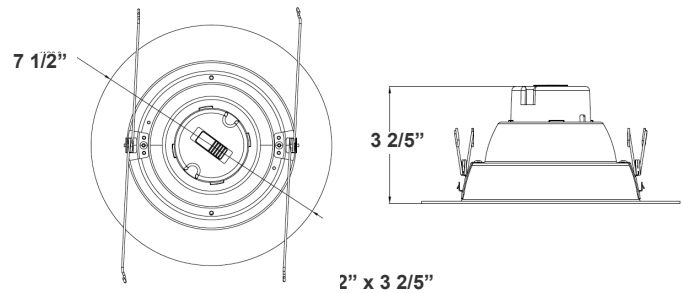


MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDL6-ST-MCT5	15W	120V	1140LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDL6-ST-MCT5-ORB	15W	120V	1140LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDL6-ST-MCT5-BK	15W	120V	1140LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K




Westgate Compatible Recessed Trims:

RDL6-BF

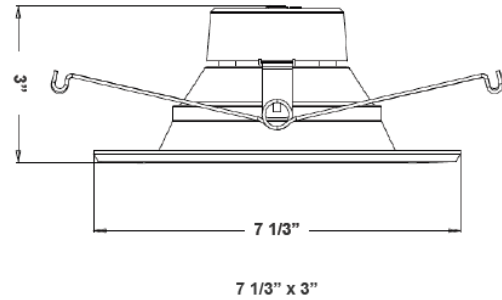

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDL6-BF-MCT5	15W	120V	1140LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDL6-BF-MCT5-ORB	15W	120V	1140LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDL6-BF-MCT5-BK	15W	120V	1140LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDL6-BF-27K	18W	120V	1120LM	2700K
RDL6-BF-30K	18W	120V	1204LM	3000K
RDL6-BF-30K-ORB	18W	120V	1204LM	3000K
RDL6-BF-35K	18W	120V	1280LM	3500K
RDL6-BF-41K	18W	120V	1300LM	4100K
RDL6-BF-50K	18W	120V	1350LM	5000K

RDL6-WP

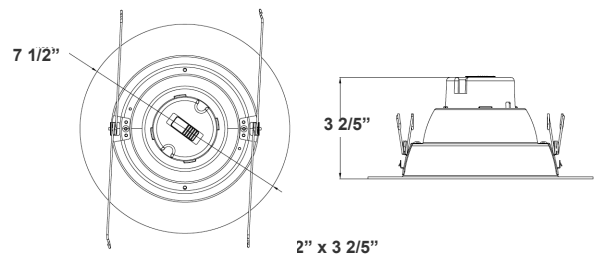


MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDL6-MCT5-WP	14W	120V	1140LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDL6-27K-WP	19W	120V	1200LM	2700K
RDL6-30K-WP	19W	120V	1250LM	3000K
RDL6-35K-WP	19W	120V	1275LM	3500K
RDL6-41K-WP	19W	120V	1300LM	4100K
RDL6-50K-WP	19W	120V	1350LM	5000K
RDL6-65K-WP	19W	120V	1400LM	6500K



Westgate Compatible Recessed Trims:

RDL6-ADJ

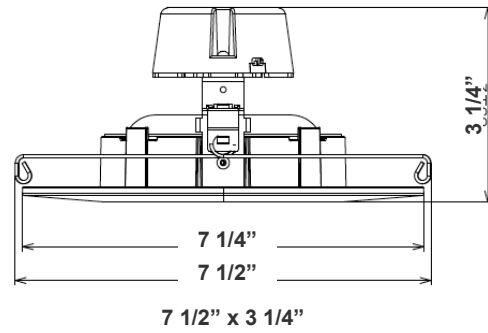


MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDL6-ADJ-27K	13W	120V	900LM	2700K
RDL6-ADJ-30K	13W	120V	900LM	3000K
RDL6-ADJ-41K	13W	120V	900LM	4100K
RDL6-ADJ-50K	13W	120V	900LM	5000K

OTHER MODEL: ICFAL-4



Side View



Top View



Back View

