

# LFE SERIES Outdoor Lighting

LFE-15W-30K-KN  
LFE-15W-40K-KN  
LFE-15W-50K-KN  
COMPACT FLOOD LIGHT



Selection:




Ideal for general site lighting, alleys, loading docks, doorways, pathway, parking areas. Replace existing HID flood lights/wall packs. Great for use with motion sensors or other instant on/off controls. Solid state lighting technology for long life, low maintenance and high efficiency.

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

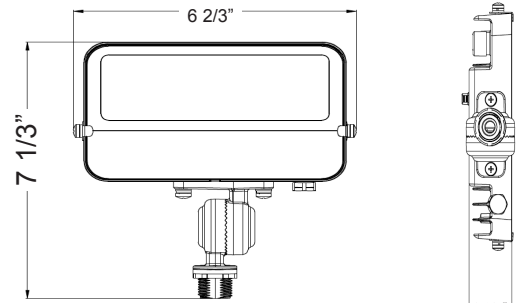

7 1/3"(H) x 6 2/3"(W) x 1 2/5"(D)

## Features

- 90° Adjustable 1/2" Knuckle Mount
- 70,000 hours rated life
- 7-Year Warranty
- No Maintenance Needed and High-Efficiency

## Technical Specifications

### Electrical:

- Voltage: 120 VAC 50/60Hz
- Wattage: 15W
- Power Factor: >0.9
- Efficacy: 106 LPW
- THD: <25%

### Mechanical:

- Die-Cast Aluminum Housing With Powder Coat Finish (Dark Bronze Finish)
- Solid State Lighting Technology For Long Life, No Maintenance Needed and High-Efficiency
- High Conductive Aluminum LED Board
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations

### Lighting:

- Cord type: 18" SJTW 18/3 AWG cable
- Total lumens: 1600LM
- Color temperature: 3000K/ 4000K/ 5000K
- Color rendering index: CRI > 70
- Beam Angle: 120° x 90°

### Applications:



- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID flood lights/ wall packs
- Great for use with motion sensors or other instant on/off controls

### Other Models:


- 15W | 1600LM | LFE-15W-30K-TR
- 15W | 1600LM | LFE-15W-40K-TR
- 15W | 1600LM | LFE-15W-50K-TR



## Photometrics: LFE-15W-KN

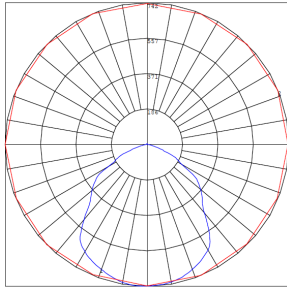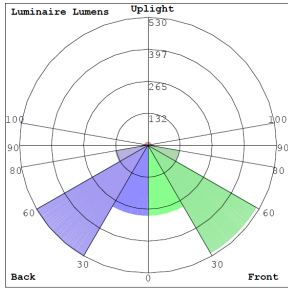

BUD Rating: B1-U2-G0

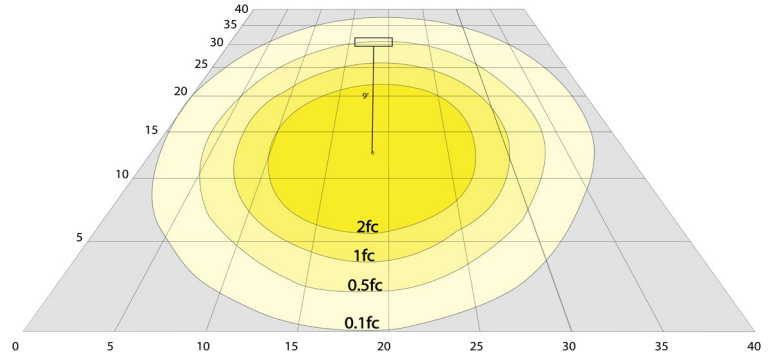

Area 40'x 40' Mounting Height: 9'

## Other Views:



Side View



Front View



Back View

## Performance Table: LFE-15W-KN

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LFE-15W-30K-KN	15W	120V	1600LM	3000K	B1-U2-G0	106
LFE-15W-40K-KN	15W	120V	1600LM	4000K	B1-U2-G0	106
LFE-15W-50K-KN	15W	120V	1600LM	5000K	B1-U2-G0	106

## Sample Ordering

Model Wattage Color Temp.

LFE - 15W -  - KN  
 3000K  
 4000K  
 5000K

## Accessories Options


Blank = No Option For Accessories

WRC-3-BRZ =Weatherproof cover with three(3) 1/2" hubs

## ACCESSORIES AND MOUNTING OPTIONS



WRC-3-BRZ  
Weatherproof cover with  
Three  
(3) 1/2" hubs



B-41



Mounts to landscape post  
or any 1/2" hub



Fully adjustable 1/2"  
threaded knuckle for aiming  
versatility

## Example:

- LFE-15W-30K-KN  
WRC-3-BRZ

(For LFE 15W 3000K fixture 120V)

(For Weatherproof cover with three(3) 1/2" hubs)

