


JOB NAME: _____

DATE: _____

TYPE: _____

DIMENSIONS:

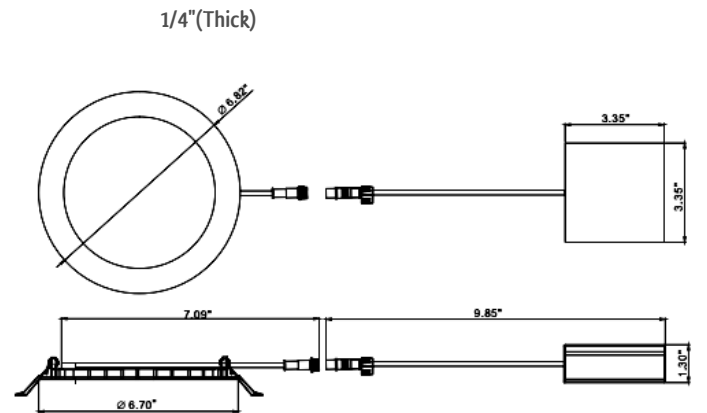

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
RSL6-27K	15W	120VAC	1125LM	2700K
RSL6-30	15W	120VAC	1125LM	3000K
RSL6-30K-BN (Brushed Nickle Finish)	15W	120VAC	1125LM	3000K
RSL6-30K-ORB (Oil-Rubbed Bronze Finish)	15W	120VAC	1125LM	3000K
RSL6-40K	15W	120VAC	1125LM	4000K
RSL6-50K	15W	120VAC	1125LM	5000K

OPTIONAL ACCESSORIES:



RSL-EXT-10FT



RSL6-RI-13/RSL6-RI

MODEL	DESCRIPTION
RSL-EXT-10FT	10 Ft. Extension Cable For use with all Slim Light
RSL6-RI-13	6" Round Rough-in Plate, 13" Long
RSL6-RI	6" Round Rough-in Plate, 26" Long

LIGHTING SPECIFICATIONS:

- Dimming: dimmable
- Lens: 0.125" white translucent acrylic
- Optics: White translucent acrylic
- LED: Seoul DOB (Driver On Board) Technology
- Total lumens: 1125LM
- Color temperature: 2700K/3000K/4000K/5000K
- Color rendering index: >80
- Beam Angle: 100° -110°

WARRANTY: 5 years



Junction box 1" thick included with fixture

- RSL6-27K
- RSL6-30K
- RSL6-30K-BN
- RSL6-30K-ORB
- RSL6-40K
- RSL6-50K

LED ULTRA SLIM RECESSED LIGHTS

Ideal for New as well as old residential and commercial constructions.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120VAC
- Wattage: 15W
- Power factor: >0.90
- Efficacy: 75LM/W

HOUSING SPECIFICATIONS:

- 1/4" Thick
- Die-cast Aluminum with white powder coat finish
- Pot light housing is not required even for insulated ceiling
- Junction box 1" thick included with fixture
- Type IC rated: Approved for direct contact with insulation
- Operating temperature: -40°F ~ 104°F
- Lifespan: 50,000 Hrs.
- Air-tight and damp location approved

CERTIFICATIONS: ETL,ES



RSL6-27K RSL6-30K
 RSL6-30K-BN RSL6-30K-ORB
 RSL6-40K RSL6-50K

LED ULTRA SLIM RECESSED LIGHTS

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
RSL6-27K	15W	120VAC	1125LM	2700K
RSL6-30	15W	120VAC	1125LM	3000K
RSL6-30K-BN (Brushed Nickle Finish)	15W	120VAC	1125LM	3000K
RSL6-30K-ORB (Oil-Rubbed Bronze Finish)	15W	120VAC	1125LM	3000K
RSL6-40K	15W	120VAC	1125LM	4000K
RSL6-50K	15W	120VAC	1125LM	5000K

BRAND OF DIMMERS:

NO.	BRAND	MODEL
1	Leviton	6631-1LT
2	Lutron	MACL-153MLH-AL
3	Lutron	TGCL-153PH-LA
4	Lutron	DVW-603PGH-WH
5	Lutron	CT-600PR-WH
6	Lutron	LGCL-153PHL-IV
7	Lutron	TGCL-153PH-LA
8	Lutron	LSLV603PWV
9	Leviton	6674-POW
10	Lutron	DVCL-153P
11	Lutron	MSCL-OP153P
12	Lutron	CTCL-153P
13	Lutron	MACL-153M
14	Pass & Seymour	HCL453PTCCCV6
15	Pass & Seymour	LSLV603PWV

