


JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_

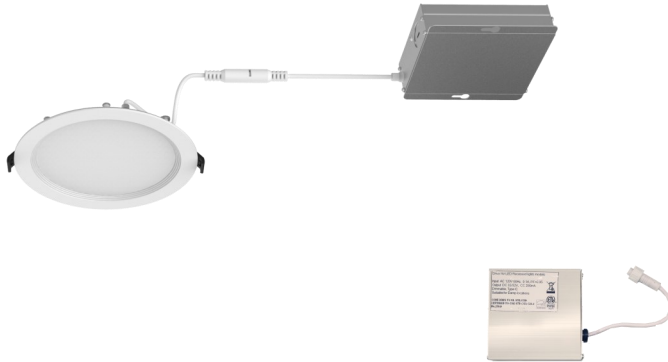

Junction box 1" thick included with fixture

**RSLC6-BF-30K**  
**RSLC6-BF-40K**  
**RSLC6-BF-50K**

## 6" LED COMMERCIAL SLIM RECESSED REGRESSED BAFFLE LIGHTS

Ideal for New as well as old residential and commercial constructions.

### ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277V
- Wattage: 12W
- Power factor: >0.90
- Efficacy: 79LM/W


### HOUSING SPECIFICATIONS:

- Die-cast Aluminum with white powder coat finish
- Junction box included with fixture
- Operating temperature: -40°F ~ 104°F
- Lifespan: 50,000 Hrs.
- Air-tight and damp location approved

### CERTIFICATIONS: UL, FCC, ES



### DIMENSIONS:

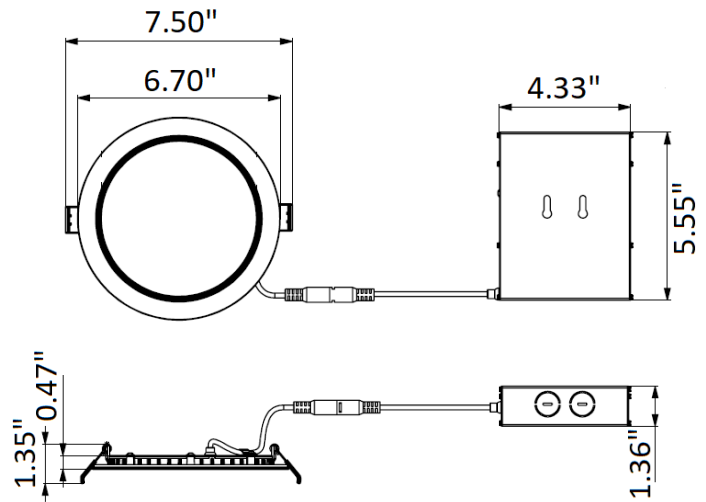

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
RSLC6-BF-30K	12W	120-277V	900LM	3000K
RSLC6-BF-40K	12W	120-277V	900LM	4000K
RSLC6-BF-50K	12W	120-277V	900LM	5000K

### OPTIONAL ACCESSORIES:



MODEL	DESCRIPTION
RSL-BF-EXT-6IN	RSL-BF 6in Extension Cord
RSL-BF-EXT-10IN	RSL-BF 10in Extension Cord
RSL-BF-EXT-20IN	RSL-BF 20in Extension Cord

### LIGHTING SPECIFICATIONS:

- Dimming: 0-10V dimmable
- Optics: White translucent acrylic
- Total lumens: 900LM
- Color temperature: 3000K/4000K/5000K
- Color rendering index: >90

### WARRANTY: 5 years

