

WMV

A9

LED VERSATILE WALL PACKS




TECHNICAL SPECIFICATIONS:

- :: ADC12 Aluminum heat sink, outdoor powder coated
- :: Optical Lens: High transmittance PC, Anti-UV & Fire resistant
- :: 100~277V AC, 60Hz
- :: Vandal resistant housing & high impact PC lens, ideal for exposed areas
- :: CRI: >70
- :: Beam Angle: 110°X130°
- :: Power Factor: 90%
- :: Operating Temp: -40°F to 104°F
- :: 70,000 hour rated life
- :: 7-year warranty
- :: Suitable for Wet Locations, IP54

APPLICATIONS:

- :: Ideal for general site lighting, loading docks, doorway, pathway and parking areas.

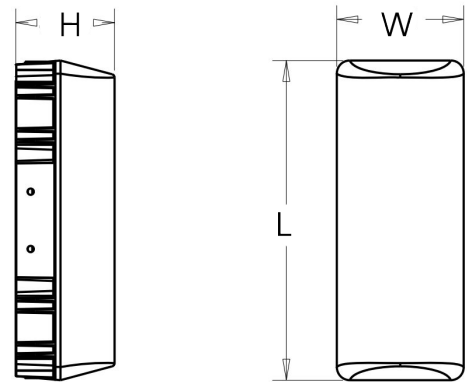

LED VERSATILE WALL PACKS

CATALOG NO.	WATTS	LUMENS	COLOR TEMP	REPLACEMENT RANGE	DIMENSIONS
WMV-20W-50K	20W	2000LM	5000K	50~100 MH	11.4"(L) x 4.5"(W) x 3.5"(H)
WMV-20W-40K	20W	1900LM	4000K	50~100 MH	
WMV-20W-30K	20W	1800LM	3000K	50~100 MH	